



**FAIRBURNS  
GROUP**

Total Electrical Solutions

**Alternative  
Products**

**Star - LED 2D Bulkhead  
Range**

Star 4 XL100 AC  
Star 4 XL100 DC

**Sun - LED Flood Light**

Spitfire 12 XL100 AC  
Spitfire 12 XL100 DC

Spitfire 24 XL100 AC  
Spitfire 24 XL100 DC

Spitfire 48 XL100 AC  
Spitfire 48 XL100 DC

**FAIRBURNS GROUP  
LIMITED**

73 – 79 Clarence Street  
Hull  
HU9 1DH

Tel: +44 (0) 1482 323 352  
Fax: +44 (0) 1482 229 873



# Endurance 18 XL110 - LED Path Light


The **Endurance 18 XL110 LED Path Light** is an environmentally friendly replacement for traditional Path Illumination.

This LED Path Light is ready for connection to either AC mains power supply or our Mercury solar power management unit, which provides a flexible lighting solution where mains power is not available or desired.

The Endurance 18 XL110 is manufactured from strong pressure die-cast aluminium with a textured grey / black full polyester powder finish.

The cover is manufactured with toughened glass.

These fittings are ideal for recreation area lighting, building lighting and car park lighting.

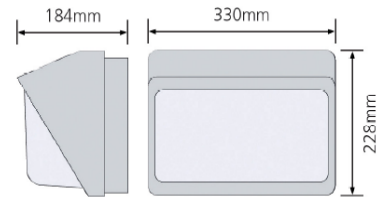

**Specifications: Endurance 18 XL110 – LED Path Light**

	AC	DC
<b>Product Code</b>	EPL18-A001-A1 / FE	EPL18-D001-B1 / FE
<b>Power Consumption LED's</b>	20.52 Watts	
<b>Power Consumption Driver</b>	4.5 Watts	N/A
<b>Total Power Consumption</b>	25.02 Watts	20.52 Watts
<b>Input Voltage</b>	90 – 264Vac	12 VDC
<b>Input Frequency</b>	47 – 63Hz	N/A
<b>Light Source</b>	1.14 W High Power LED	
<b>LED QTY</b>	18	
<b>Total LED Output</b>	1980 lm	
<b>Efficiency (Typ.)</b>	85%	
<b>LED Colour</b>	Cool White	
<b>Colour Temp (K)</b>	5400 - 6300 degrees K (Standard)	
<b>CRI</b>	Ra>70	
<b>LED Lifespan</b>	50,000 > 80,000 Hours	
<b>Operating Temperature</b>	-30 degrees C to + 50 degrees C	
<b>Working Humidity</b>	0 ~ 95%	
<b>Turn on time</b>	100ns	
<b>Product Size (mm)</b>	338mm x 220mm x 184mm	
<b>Unit colour</b>	textured grey / black	
<b>Net Weight</b>	5.5Kg	
<b>Mounting</b>	Internal Mounting Holes	
<b>Protection Rate</b>	IP65	
<b>Certification</b>	RoHS, CE	
<b>Warranty</b>	3 Years	